



visit-us:
www.mss.id
www.thurayatopup.id

THURAYA 

www.thuraya.com

Follow us on    [/thurayatelecom](https://www.youtube.com/thurayatelecom)

Thuraya T2M-DUAL
Mobility. Versatility. Reliability. Efficiency



THURAYA 



Mobility. Versatility. Reliability. Efficiency

Our current pace of development requires the constant support of ever-evolving technology. As industries and organizations extend the potential of existing markets and tap into new ones, the need to collect and manage data seamlessly becomes more urgent.

Tracking and monitoring assets, fixed or mobile, located across changing points, has traditionally been a complex process. However, as operations delve further into remote territories, it is increasingly vital to rely on solutions that are simpler, flexible, more affordable and less labor-intensive.

The Thuraya T2M-DUAL terminal (Thuraya Tracking and Monitoring) addresses these challenges by enabling IoT and M2M use cases. The dual mode terminal allows smarter, more streamlined and automated data capture over both Satellite and GSM networks by offering diverse modes of communication:

1. Fleet Management mode
2. Logger mode
3. Modem mode


The Thuraya T2M-DUAL's automated network mode selection is regulated by least cost routing, which ensures unrivalled total cost of ownership. T2M-DUAL facilitates actionable data delivery right to the operator or manager, thereby improving asset performance and process efficiency. The terminal is designed to withstand harsh environmental conditions, vibration and shock.

Quick, Extensive and Resilient Tracking


Thuraya T2M-DUAL is the world's only Satellite - GSM solution that allows Satellite Messaging, GmPRS IP Data and Circuit Switched 9.6 kbps data to enable simultaneous collection of data from multiple points and sources including location information, data from external sensors and peripheral devices and input collected from vehicle or heavy equipment CANbus. The terminal's robust system and interoperability render it a top-class solution for wide-scale, often mobile operations in sectors like transportation, government, energy and utilities, agriculture, hydro environment and mining.

Dual Use – Track Fixed or Mobile Assets

- Dual-mode coverage: Dual-mode auto-switching between Thuraya's satellite M2M network and partner GSM networks allows for seamless, always-on coverage
- Choice of transmission: Unmatched choice of transmission to meet any use case communicate over 3G GSM or Satellite: Messaging, GmPRS IP Data, Circuit Switched 9.6 kbps data
- Mobile fleet tracking: Track and manage vehicles and assets across borders, to ensure remote asset safety and efficiency
- Operational efficiency: With the ability to gauge and continually monitor events, T2M-DUAL helps operators make smarter decisions to drive operational efficiency
- Low total cost of ownership: Cost effective data plans with a data pooling option, giving peace of mind with predictable costs

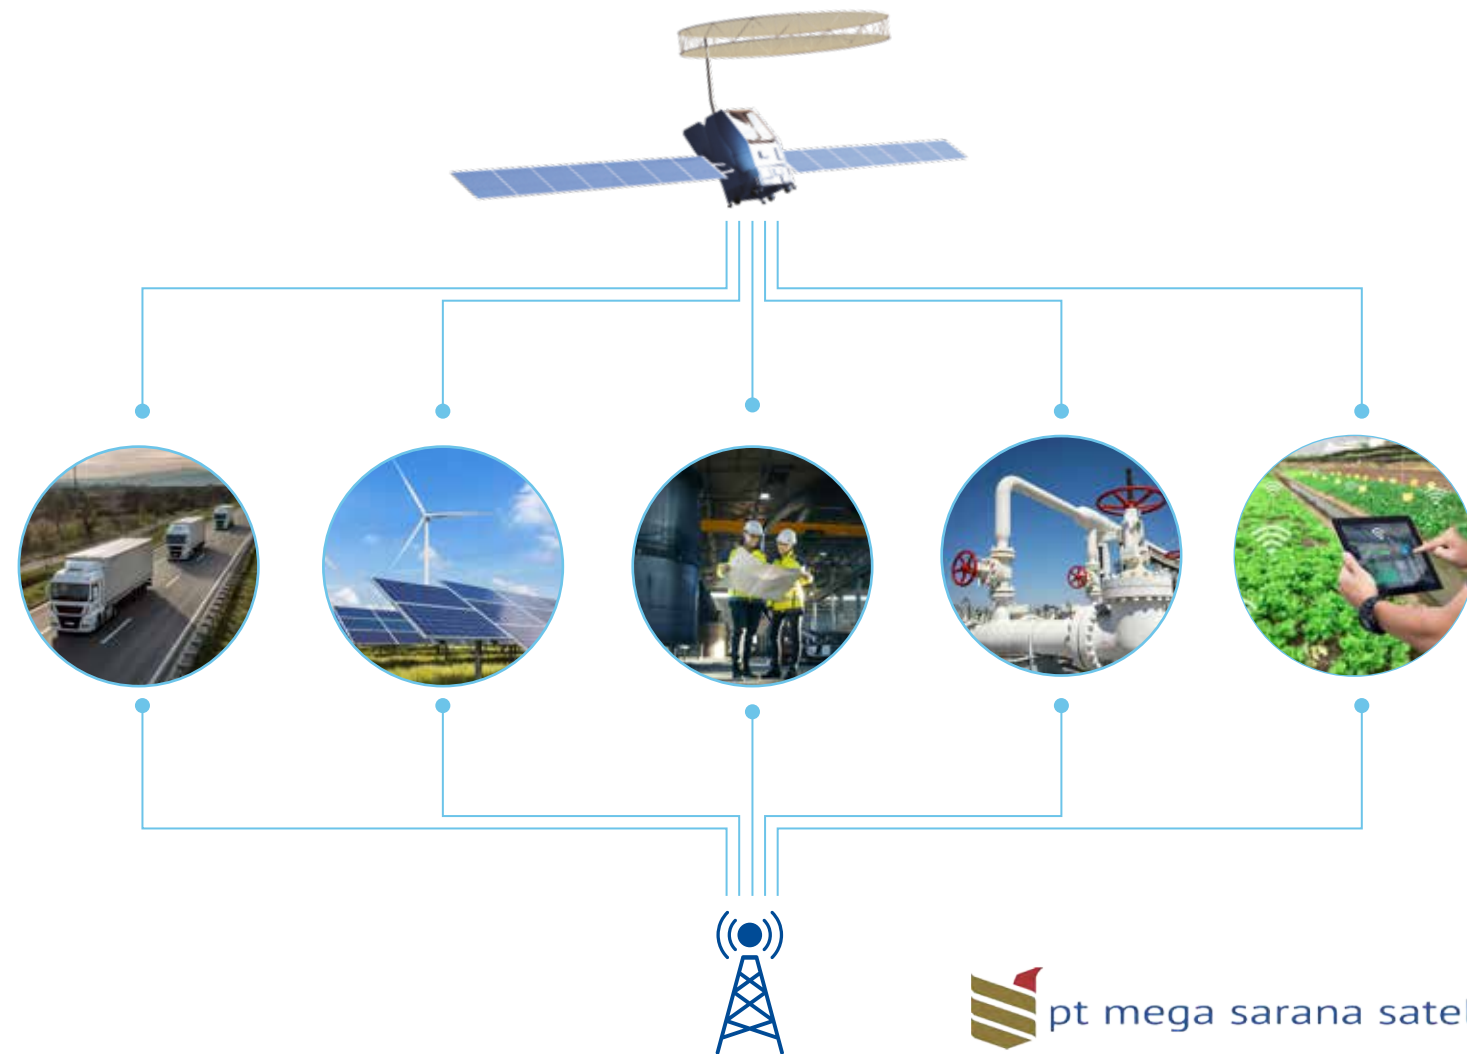

Product Features

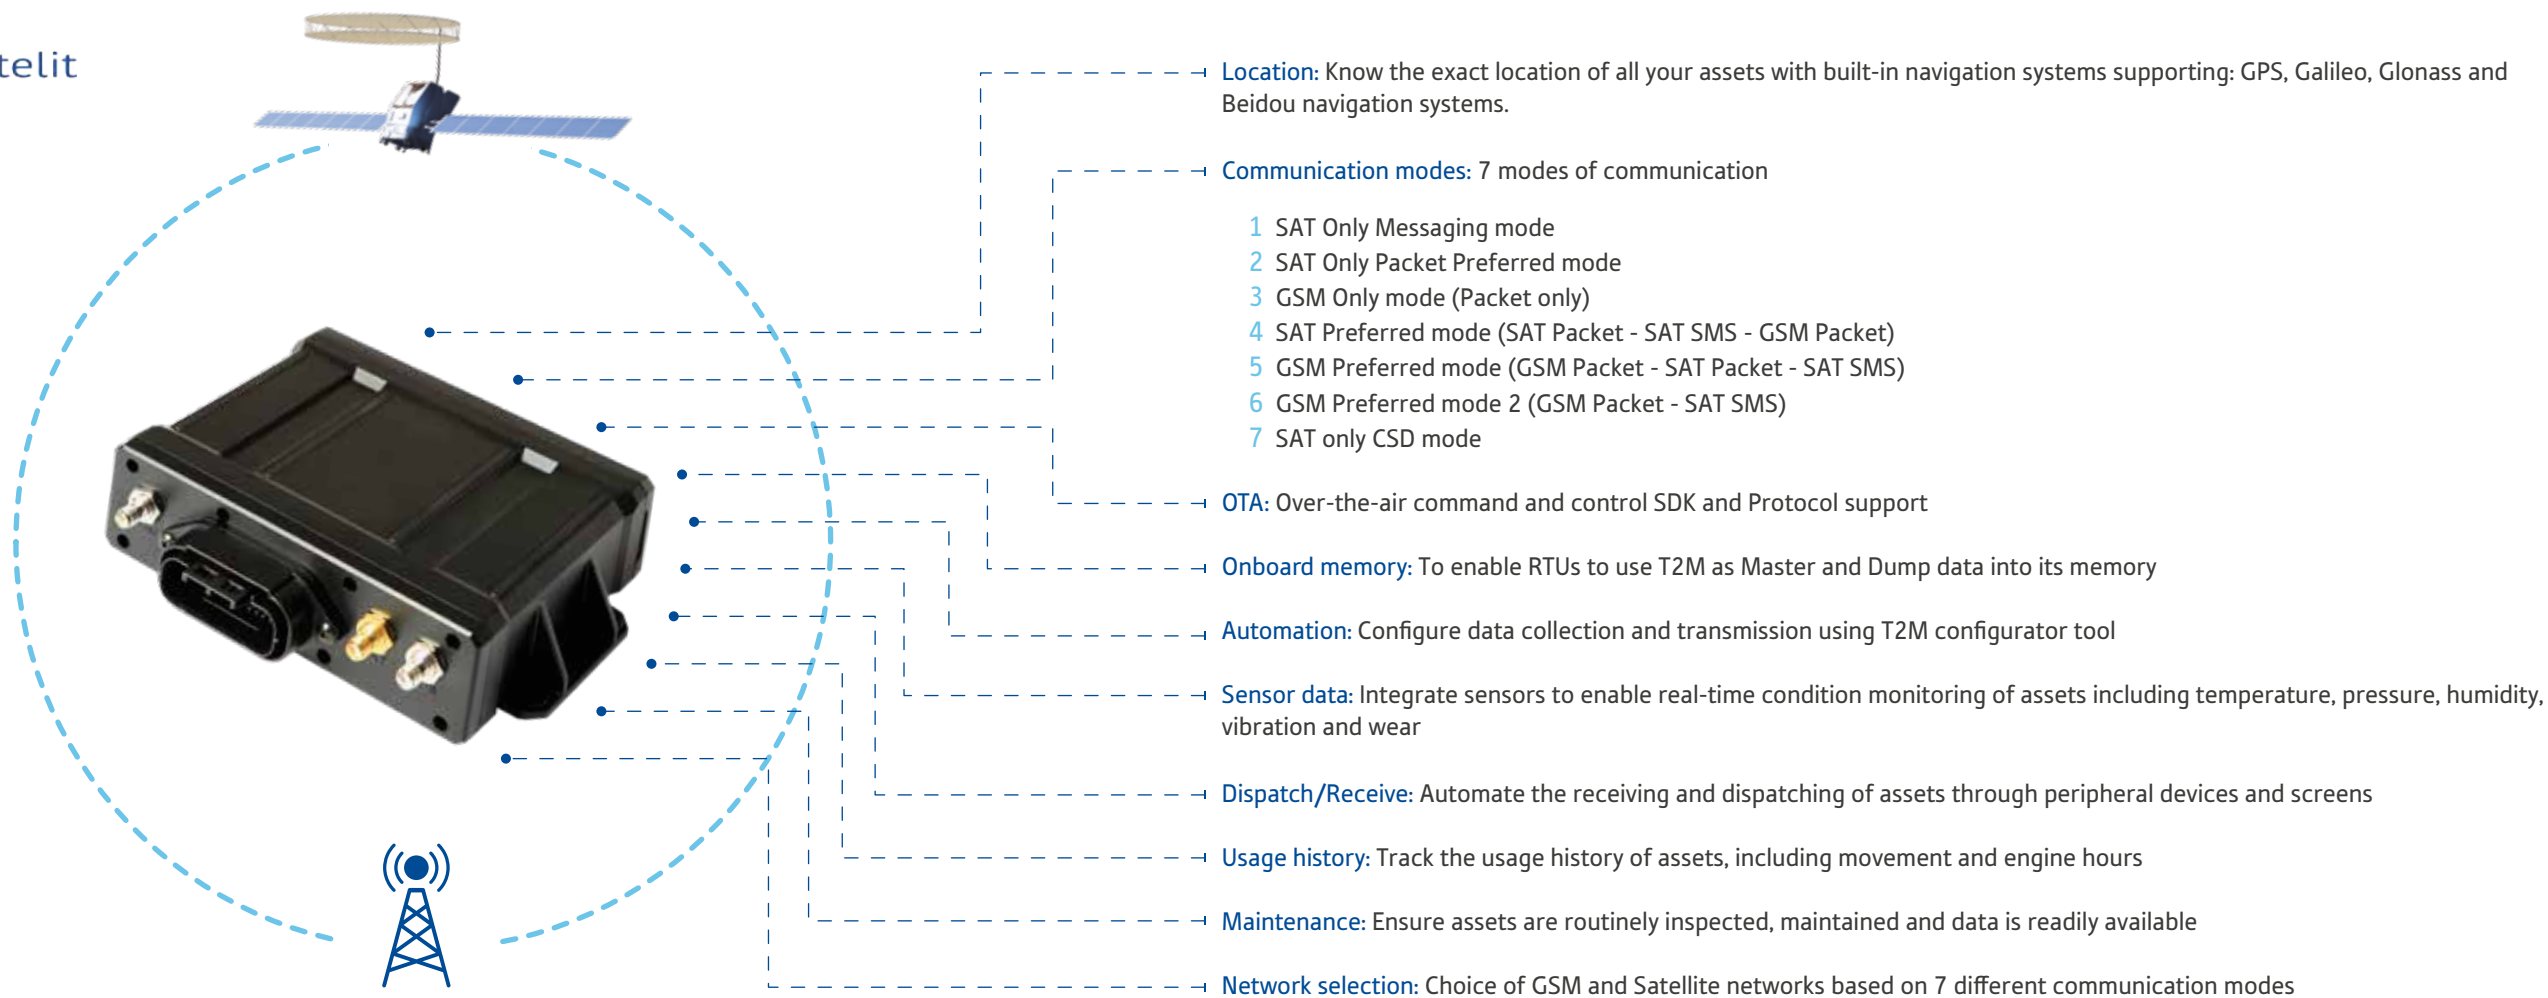



Communication Modes

3 independent modes of operation:


- 1 Tracker mode: It has the capability of sending the CANbus data of GPS data and I/O data
- 2 Logger mode: It has the capability of sending the raw data of the external serial device using UART1 port or UART2 port to the destination server
- 3 Modem mode: Thuraya T2M-DUAL acts as slave to the external device. It supports AT commands initiated from external device

Key Uses


- Fleet management
- Rail tracking
- Oil & Gas SCADA and Pipeline monitoring
- Smart grid and smart metering applications
- Security, surveillance and tracking
- Weather station monitoring
- Hydro and environmental management

Thuraya T2M-DUAL System Schematic

Always-on coverage with auto switching between
Satellite and GSM networks

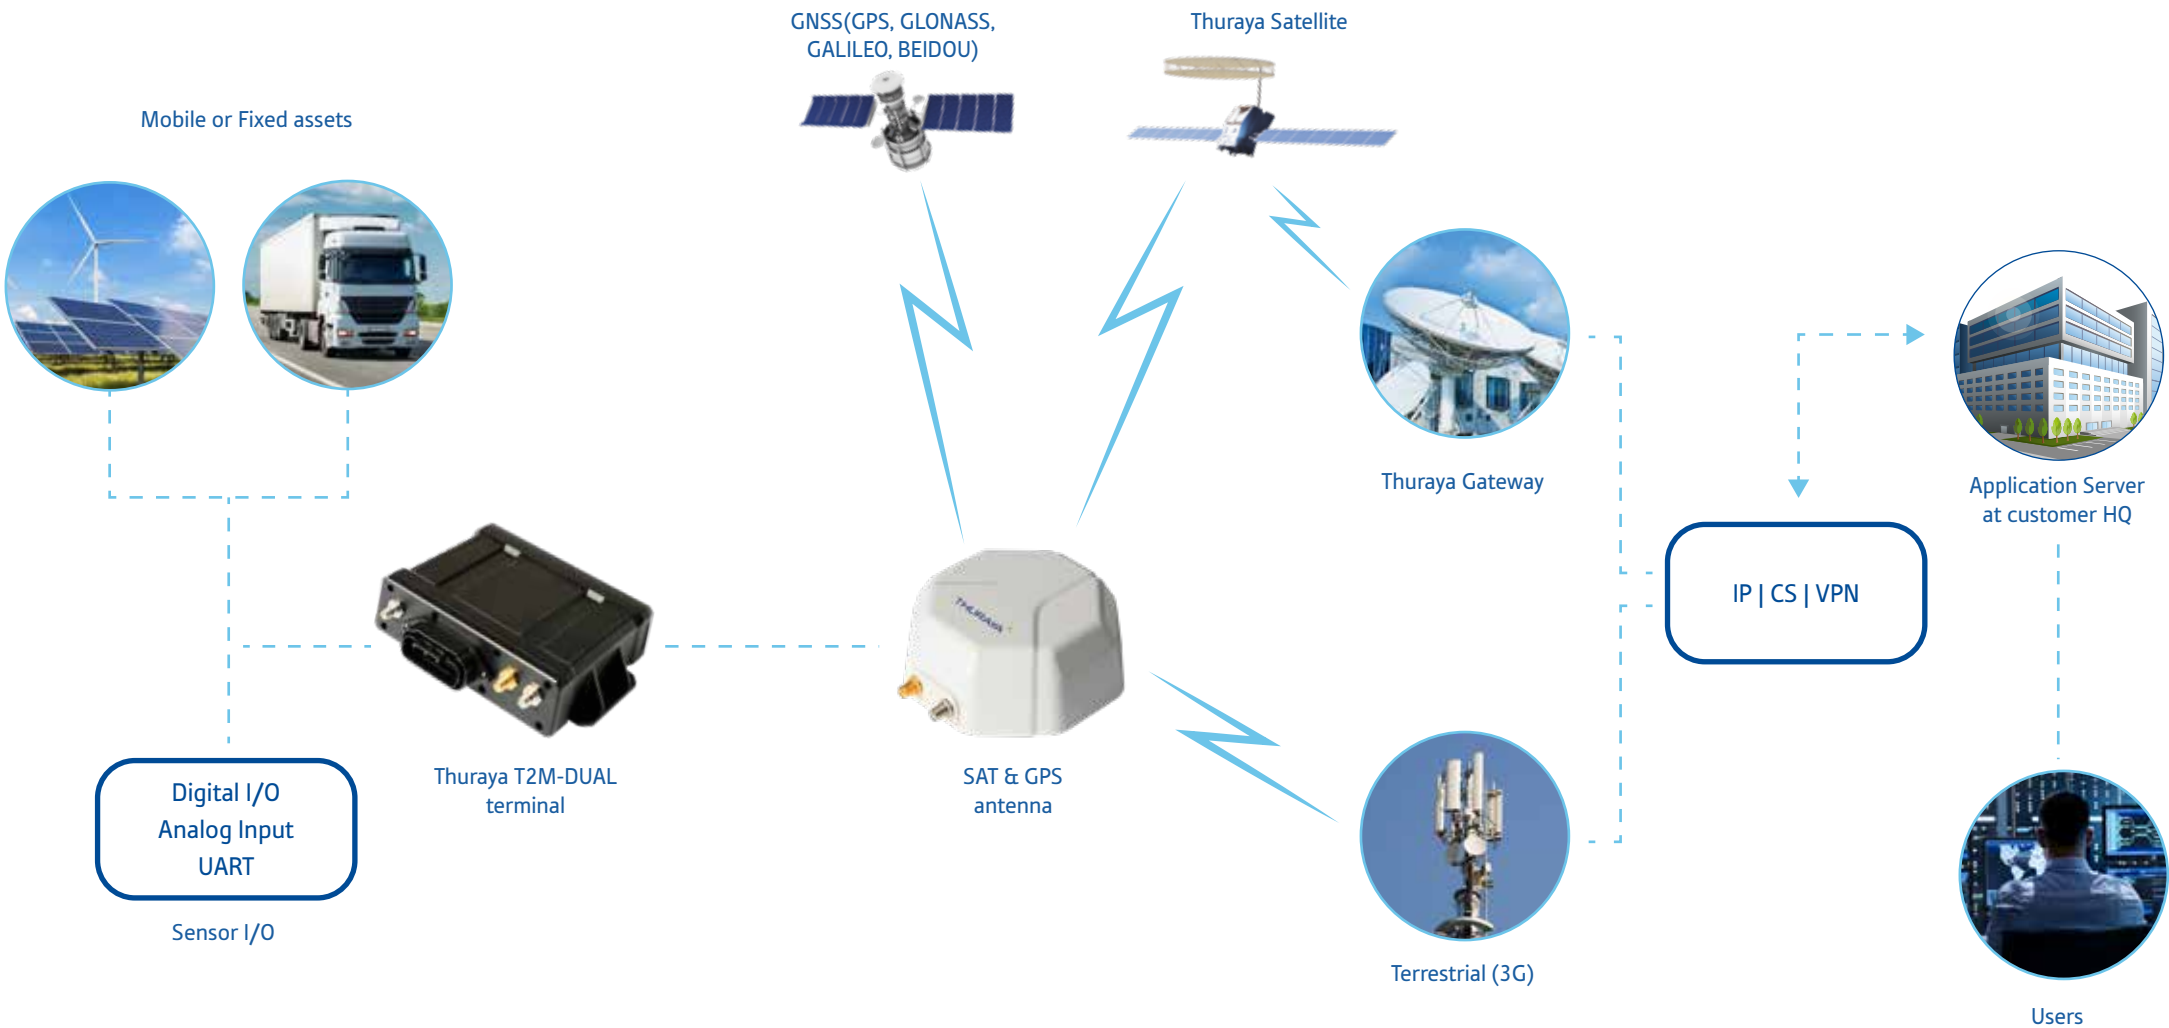

Thuraya T2M-DUAL offers the advantage of reliable satellite communications even in the most challenging environments and remote locations.



This map represents Thuraya expectations of coverage. For further information, please contact Thuraya Customer Care at customer.care@thuraya.com or visit www.thuraya.com

visit-us:

www.mss.id

www.thurayatopup.id

General Specifications



General Specifications		
Item	Specification	Description
Size (mm)	133(W) x 103(L) x 39.8(H)	Unit: mm
Weight	395 g 1.35 kg	T2M – DUAL terminal Including accessories
Operating Temperature	-30°C ~ +70°C -20 oC ~ +60°C	Excluding backup battery Including backup battery
Battery Capacity	3000 mAh	Li-ion
Storage Temperature	-40°C ~ +85°C	
Vibration	Random 5~20Hz 0.05g2/Hz, 20~150Hz: - 3dB/oct.(1.7g rms), 3-axis, 30 minutes for each axis	
Humidity	+70°C / 95% / 48 Hours, Operating	

Terminal Specifications			
Communication Modem	SAT 3G	Thuraya SM-2700 3G Data Modem	Supports Thuraya Satellite Network Supports Band I, Band V, Band VIII.
GNSS	Chipset TTFF	UBLOX-M8030 • Cold Start: 26sec • Hot Start : 1sec	Supports multi-GNSS: GPS, Beidou, Glonass, Galileo
Ingress Protection		> IP66	
Operating Voltage		+10 Vdc ~ +34 Vdc	
I/O Connector		26 Pin	Waterproof connector
Interfaces		CANbus protocol (J1939) User programmable CAN configuration 4 Digital Input/ Output 2 Analog ADC Data Input 2 Serial RS232 Port 1-Wire Communication	
SIM Slot		SAT: Mini SIM GSM: Micro SIM	
LED		4 LEDs	Power, SAT, GSM, GPS
Additional		DIP Switch Reset Button	Set vehicle voltage Reset terminal
Antenna			
SAT & GPS Antenna		Frequency Impedance Polarization Axial Ratio Gain Size Connector Ingress Protection Mounting	1525Mhz ~ 1660.5 Mhz (SAT) 50Ω LHCP (SAT) / RHCP(GPS) < 4dB > 5dBic@peak 110 (D) x 42(H) SAT: SMA(F), Gold color GPS: SMA(F), Silver color IP67 Magnetic Mounting Bracket Mounting
3G Antenna		Type Beam Pattern Impedance	Basic: Internal Multi-Band Antenna Optional: External Multi-Band Antenna Omni-Directional 50 Ω